



VIGOR PRECISION LTD 力嘉精密有限公司

Flat A1, A4-A8, 8/F, Block A, Texaco Road Industrial Centre, 256-264 Texaco Road, Tsuen Wan Hong Kong
 香港荃灣德士古道256-264號德士古道工業中心A座8字樓A1, A4-A8 室

Tel電話: (852)2407 5498(8 lines) Fax傳真: (852) 2407 3148

E-mail電子郵件: enquiry@vigorprecision.com.hk Web Site網址: <http://www.vigorprecision.com.hk>

BO26C (gearbox)

OUTPUT: 1W~45W (APPROX)

WEIGHT: 162g

Typical applications: Commercial Product

Massager / Vibrator

Automatic Vending Machine


Power Tools

Office Automation Equipments

Household Appliances



| Model | Gear ratio | Voltage (V) | No Load | | Max Efficiency (%) | | | Max Output (W) | | | Stall | |
|-----------------|------------|-------------|-------------|-------------|--------------------|-------------|-----------------|----------------|-------------|-----------------|-----------------|-------------|
| | | | Speed (rpm) | Current (A) | Speed (rpm) | Current (A) | Torque (kgf.cm) | Speed (rpm) | Current (A) | Torque (kgf.cm) | Torque (kgf.cm) | Current (A) |
| BO26-81C-18205 | 81 | 12.0 | 60 | 0.13 | 50 | 0.45 | 3.50 | 30 | 1.15 | 10.60 | 21.20 | 2.19 |
| BO26-133C-18205 | 133 | 12.0 | 37 | 0.13 | 31 | 0.45 | 5.60 | 18.5 | 1.15 | 17.50 | 35.00 | 2.19 |
| BO26-292C-18205 | 292 | 12.0 | 17 | 0.13 | 14 | 0.45 | 12.20 | 8.5 | 1.15 | 38.40 | 76.80 | 2.19 |
| BO26-371C-18205 | 371 | 12.0 | 13 | 0.13 | 11 | 0.45 | 15.60 | 6.5 | 1.15 | 48.80 | 97.60 | 2.19 |

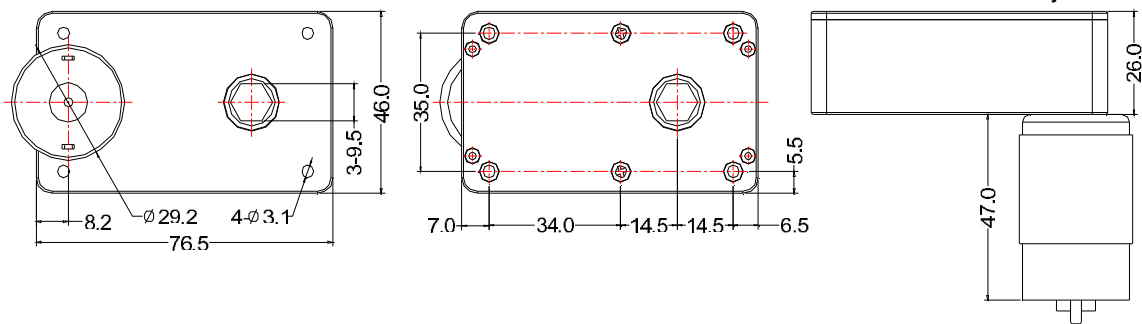

BO26-133C-18205

12.0V

BO26-292C-18205

12.0V

