



# VIGOR PRECISION LTD 力嘉精密有限公司

Flat A1, A4-A8, 8/F, Block A, Texaco Road Industrial Centre, 256-264 Texaco Road, Tsuen Wan Hong Kong  
 香港荃灣德士古道256-264號德士古道工業中心A坐8字樓A1, A4-A8 室

Tel電話: (852)2407 5498(8 lines) Fax傳真: (852) 2407 3148

E-mail電子郵件: enquiry@vigorprecision.com.hk Web Site網址: http://www.vigorprecision.com.hk

## BO-P2WITH F030 MOTOR (planetary gearbox)

OUTPUT : 0.05W~0.5W (APPROX)

WEIGHT : 14 g


Typical applications : Consumer Electronic Products  
 Personal Care Product  
 Office Automation Equipments

Toys and Models



Model	Gear ratio	Voltage (V)	No Load		Max Efficiency (%)			Max Output (W)			Stall	
			Speed (rpm)	Current (A)	Speed (rpm)	Current (A)	Torque (kgf.cm)	Speed (rpm)	Current (A)	Torque (kgf.cm)	Torque (kgf.cm)	Current (A)
BP2-28F030-08250D	28	2.5	140	0.06	103	0.085	0.027	140	0.10	0.063	0.126	0.18
BP2-28F030-10180D	28	5.0	410	0.08	325	0.23	0.085	205	0.40	0.2	0.40	0.70

For Reference Only

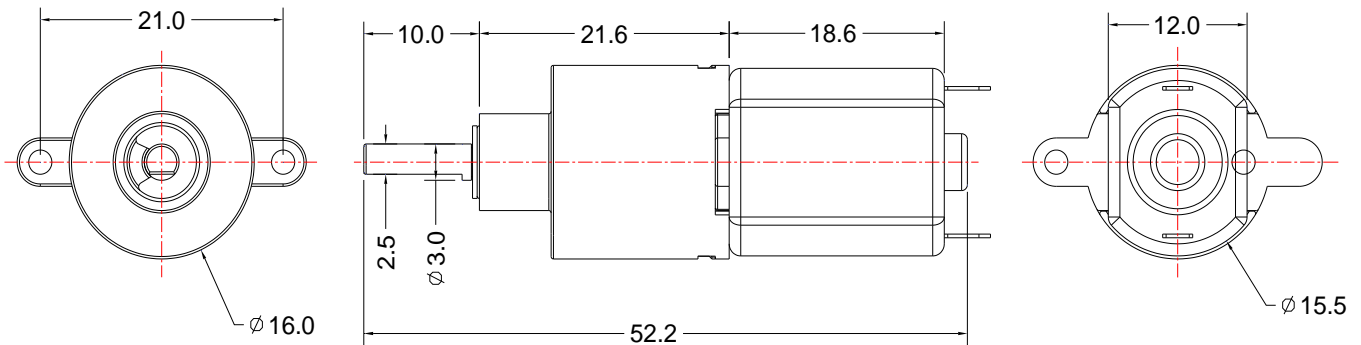

Unit:mm

BP2-28F030-08250D

2.5V

BP2-28F030-10180D

5.0V

