



VIGOR PRECISION LTD 力嘉精密有限公司

Flat A1, A4-A8, 8/F, Block A, Texaco Road Industrial Centre, 256-264 Texaco Road, Tsuen Wan Hong Kong
 香港荃灣德士古道256-264號德士古道工業中心A坐8字樓A1, A4-A8 室

Tel電話: (852)2407 5498(8 lines) Fax傳真: (852) 2407 3148

E-mail電子郵件: enquiry@vigorprecision.com.hk

Web Site網址: http://www.vigorprecision.com.hk

BO-P3 WITH R140 MOTOR (planetary gearbox)

OUTPUT : 0.2W~3.0W (APPROX)

WEIGHT : 35g

Typical applications : Toys and Models


Personal Care Product

Office Automation Equipments



Model	Gear ratio	Voltage (V)	No Load		Max Efficiency (%)			Max Output (W)			Stall	
			Speed (rpm)	Current (A)	Speed (rpm)	Current (A)	Torque (kgf.cm)	Speed (rpm)	Current (A)	Torque (kgf.cm)	Torque (kgf.cm)	Current (A)
BP3-96R140-18100D	96	4.5	168	0.35	133	0.80	0.66	84	1.65	1.55	3.10	3.0
BP3-96R140-2485D	96	3.0	105	0.25	86	0.86	0.75	52	2.12	2.25	4.50	4.0

For Reference Only

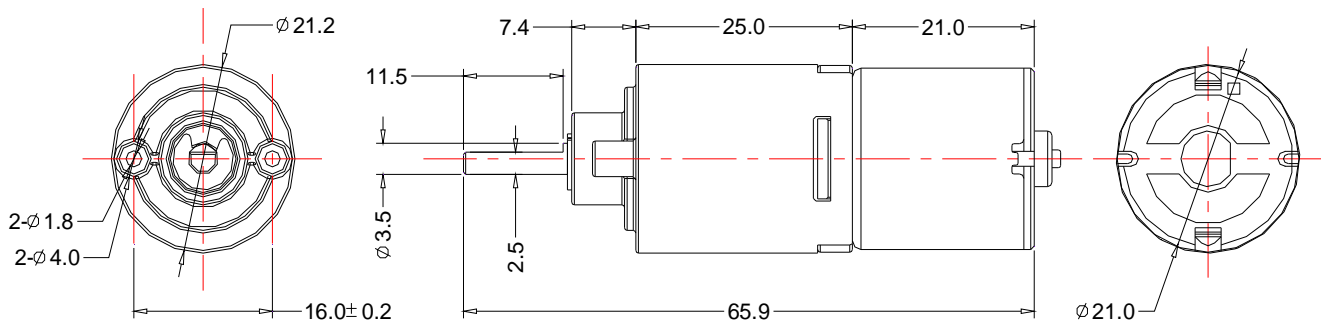

Unit:mm

BP3-96R140-18100D

4.5V

BP3-96R140-2485D

3.0V

