



VIGOR PRECISION LTD 力嘉精密有限公司

Flat A1, A4-A8, 8/F, Block A, Texaco Road Industrial Centre, 256-264 Texaco Road, Tsuen Wan Hong Kong
 香港荃灣德士古道256-264號德士古道工業中心A坐8字樓A1, A4-A8 室

Tel電話: (852)2407 5498(8 lines) Fax傳真: (852) 2407 3148

E-mail電子郵件: enquiry@vigorprecision.com.hk Web Site網址: http://www.vigorprecision.com.hk

BO-P5 RATIO 1:140 WITH R280 MOTOR (planetary gearbox)

OUTPUT : 0.5W~24 W (APPROX)

WEIGHT : 63g


Typical applications : Consumer Electronic Products
 Personal Care Product
 Office Automation Equipments
 Toys and Models

Household Appliances
 Massager / Vibrator
 Power Tools



Model	Gear ratio	Voltage (V)	No Load		Max Efficiency (%)			Max Output (W)			Stall	
			Speed (rpm)	Current (A)	Speed (rpm)	Current (A)	Torque (kgf.cm)	Speed (rpm)	Current (A)	Torque (kgf.cm)	Torque (kgf.cm)	Current (A)
BP5-N40R280-2685D	40	3.0	131	0.25	111	0.67	0.60	65	1.70	1.80	3.60	3.20
BP5-N40R280-14240D	40	24.0	370	0.16	320	0.52	1.20	185	1.40	3.60	7.20	2.63

For Reference Only

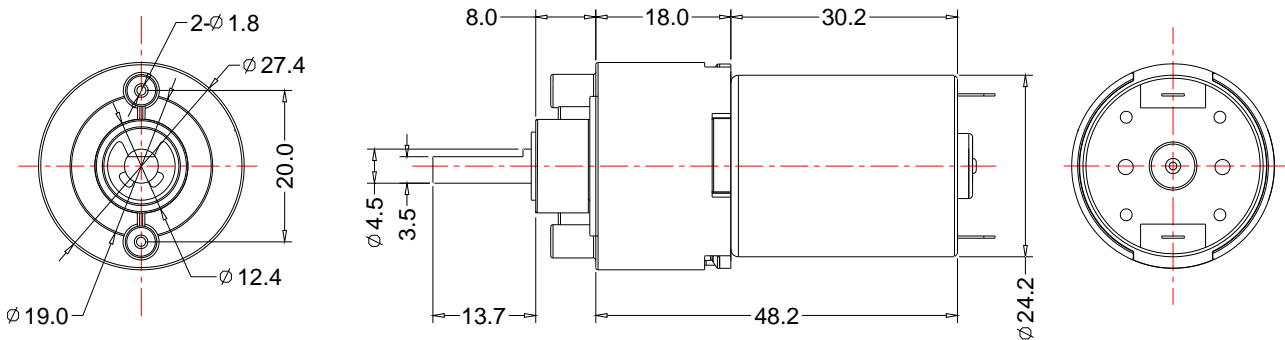

Unit:mm

BP5-N40R280-2685D

3.0V

BP5-N40R280-14240D

24.0V

