



VIGOR PRECISION LTD 力嘉精密有限公司

Flat A1, A4-A8, 8/F, Block A, Texaco Road Industrial Centre, 256-264 Texaco Road, Tsuen Wan Hong Kong
 香港荃灣德士古道256-264號德士古道工業中心A坐8字樓A1, A4-A8 室

Tel電話: (852)2407 5498(8 lines) Fax傳真: (852) 2407 3148

E-mail電子郵件: enquiry@vigorprecision.com.hk

Web Site網址: http://www.vigorprecision.com.hk

BO-P6 WITH R360 MOTOR (planetary gearbox)

OUTPUT : 1.0W~35W (APPROX)

WEIGHT : 78g


Typical applications : Consumer Electronic Products
 Personal Care Product
 Office Automation Equipments
 Toys and Models

Household Appliances
 Massager / Vibrator
 Power Tools



Model	Gear ratio	Voltage (V)	No Load		Max Efficiency (%)			Max Output (W)			Stall	
			Speed (rpm)	Current (A)	Speed (rpm)	Current (A)	Torque (kgf.cm)	Speed (rpm)	Current (A)	Torque (kgf.cm)	Torque (kgf.cm)	Current (A)
BP6-N12R360-14280D	120	12.0	48	0.15	39	0.38	4.66	24.0	0.70	11.88	23.76	1.34
BP6-N12R360-10500D	120	24.0	57	0.10	45	0.25	3.30	28.0	0.42	8.78	16.56	0.80

For Reference Only

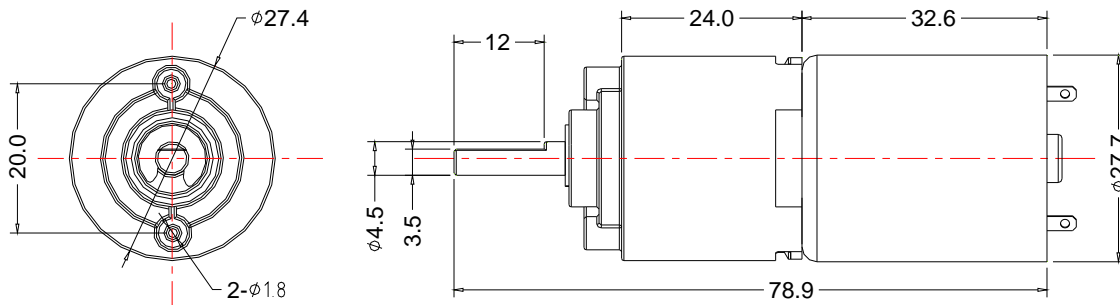

Unit:mm

BP6-N12R360-14280D 12.0V

BP6-N12R360-10500D 24.0V

